



**Tacoma Facility**

1427 E 26th Street

Tacoma, WA 98421

(253) 272-7788


**Quincy Facility**

1302 NE Intermodal Way

Quincy, WA 98848

(509) 497-0350

## ***PVC SPLIT DUCT***

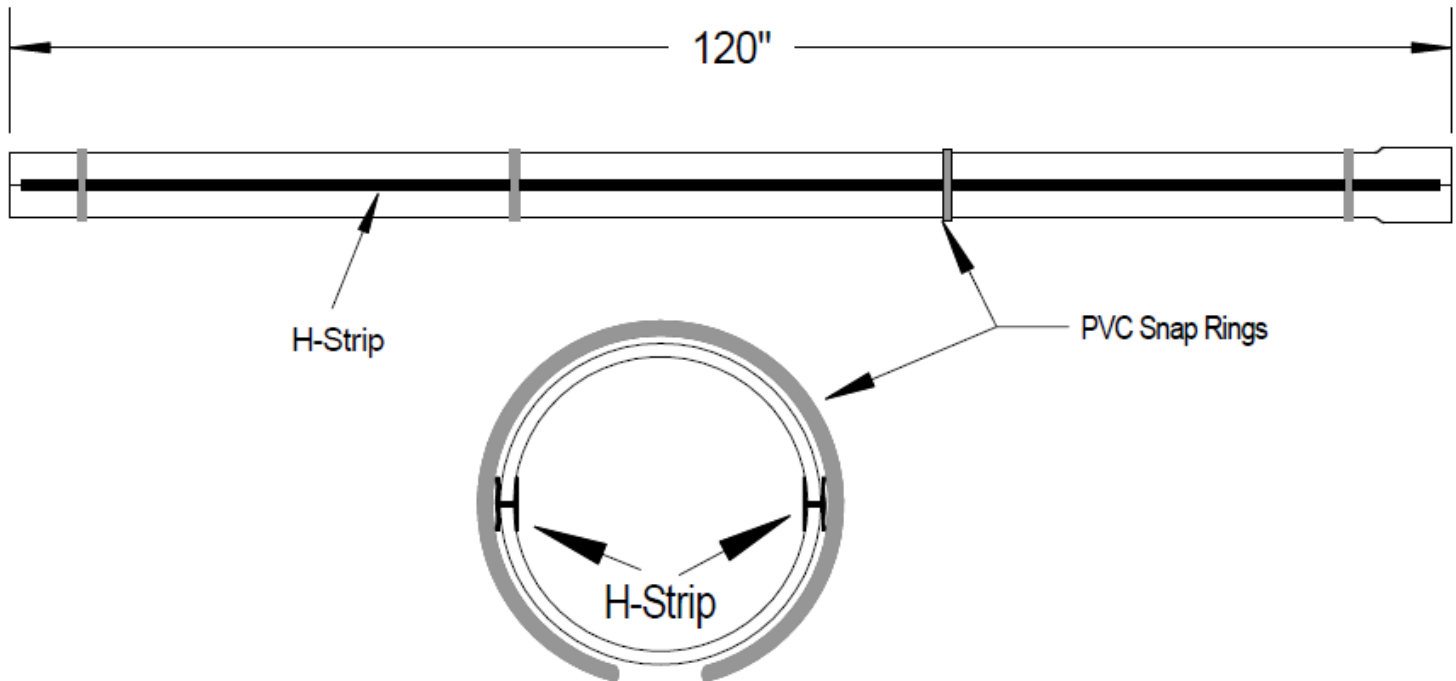

### **Advantages & Highlights of Split Duct**

- Schedule 40 & 80 pipe conforming to UL 651 and NEMA TC-2 *Electrical Polyvinyl Chloride (PVC) Conduit*
- DB120 pipe is conforming to ASTM F512 *Smooth-Wall Poly(Vinyl Chloride) (PVC) Conduit and Fittings for*
- *Underground Installation*
- Split Duct is available in Schedule 40, 80, and DB120 with sizes from 1/2" to 6"
- 10 foot sticks are cut in half and reassembled with H-strips and PVC snap rings
- Split duct less than 2" OD does not contain H-strips
- Contact Raceways for split duct elbow availability
- Dimensions are approximate and subject to normal manufacturing tolerances.

\*Other sizes available upon request